


**SOUND ABSORPTION MEASURED AND EVALUATED  
ACCORDING TO ISO 354 AND SS-EN ISO 11654**

CLIENT: Abstracta AB

OBJECT: Abstracta Alumi Screen 1500mm, 1500×1200 mm<sup>2</sup>, total area tested 10.8 m<sup>2</sup> (three double sided screens), Absorptive area 1.80 m<sup>2</sup> on each side with aluminum frame. Standing screens above hard surface.

1/3 octave band (Hz)	Equivalent sound absorption area / unit (m <sup>2</sup> Sabine)	
	1/3 octave band	Octave band
50	0,29	
63	0,50	0,4
80	0,25	
100	0,29	
125	1,26	0,9
160	1,40	
200	1,73	
250	2,05	2,0
315	2,34	
400	2,48	
500	2,70	2,7
630	2,77	
800	2,88	
1000	2,84	2,9
1250	2,95	
1600	2,95	
2000	2,92	2,9
2500	2,84	
3150	2,84	
4000	2,88	2,9
5000	2,95	

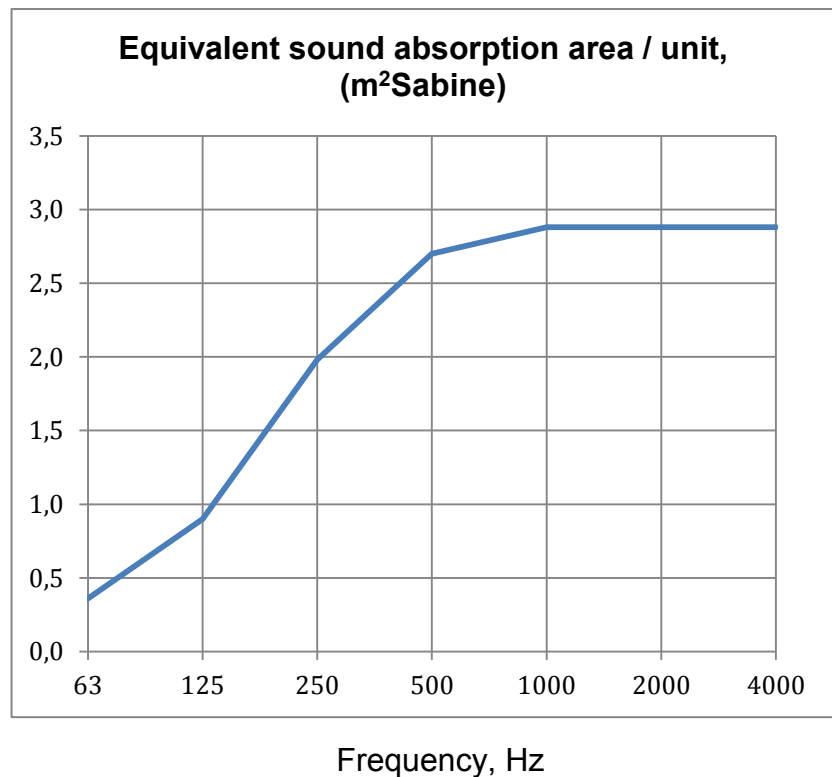

**CONDITIONS**

Date of test: 2010-06-24  
Date: 2013-06-14

Object surface: 3.60 m<sup>2</sup>  
Reverberation room volume: 200 m<sup>3</sup> Temperature: 24°C

Relative humidity: 89%

Test report: PX04109BE (SP Sweden)

Signature: Xuetao Zhang