

TECHNICAL CHARACTERISTICS

CDRYOUT

Dry out







Cabinet

The Dry Out cabinet expresses the essence of refined design. Its structure is defined by a ribbed aluminium profile, characterised by fine lines that bring texture, rhythm and precision to the piece. Available in an open version with shelves, suitable for outdoor spaces, or with a sliding-door module for indoor use.

DESIGNED BY BLUE DESIGN & ONDARRETA TEAM



ondarreta

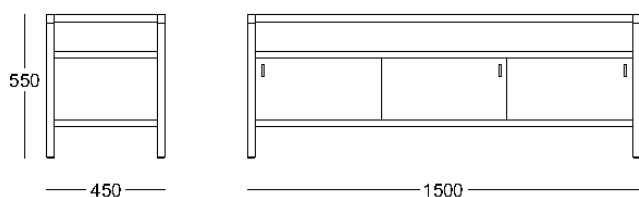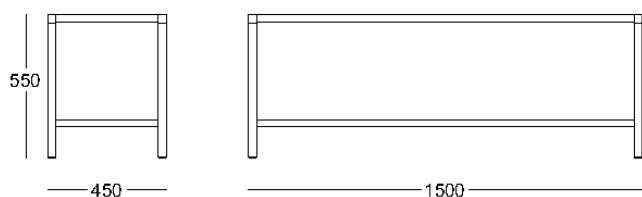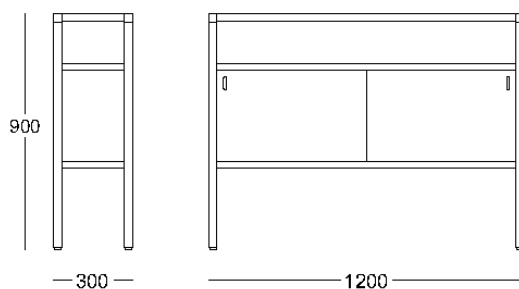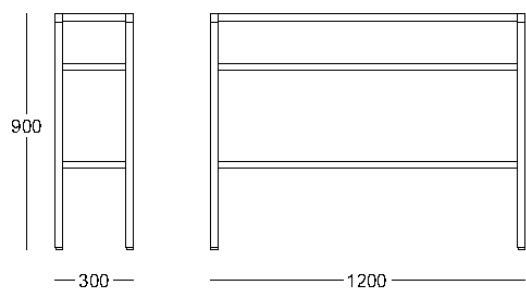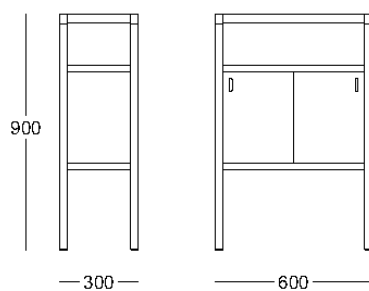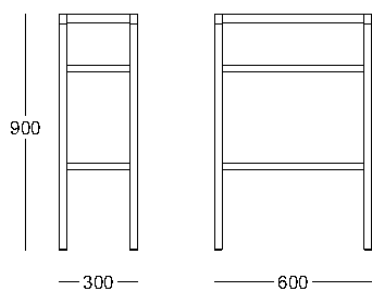

DIMENSIONS

60 cm x 30 cm x 90 cm

120 cm x 30 cm x 90 cm

150 cm x 45 cm x 55 cm

[width x depth x height]

WEIGHT

60 x 30 x 90 (14 kg / 30,8 lb)

120 x 30 x 90 (18 kg / 39,7 lb)

150 x 45 x 55 (20 kg / 44,1 lb)

60 x 30 x 90 with doors module
(22 kg / 48,5 lb)

120 x 30 x 90 with doors module
(34 kg / 75,0 lb)

150 x 45 x 55 with doors module
(50 kg / 110,2 lb)

PACKAGING

One piece per box

ACCESSORIES

Castors

ORIGEN

100% Made in Europe

DESIGN

Blue Design & Ondarreta Team

ondarreta



COMPONENTS

FRAME

Extruded Aluminium

Extruded aluminium frame made from 100% recycled aluminium, with a 30 x 30 mm square section and longitudinal ribbing.

LOW CARBON material with a chemical composition in accordance with EN 573-3 and mechanical properties in line with the values of EN 755-2, estimated based on surface hardness.

Finish

Colour epoxy Linen, Anthracite, Brique, Green Grass and Anodized Aluminium.

UNION PIECE

Die-cast aluminium

Piece made of die-cast aluminium, ensuring high dimensional accuracy and geometric consistency.

Suitable for both indoor and outdoor use, with good mechanical performance, high durability and long-term stability.

Finish

Colour epoxy Linen, Anthracite, Brique, Green Grass and Anodized Aluminium.

SHELVES

Aluminium

1.5 mm thick aluminium sheet, laser-cut and folded.

Finish

Colour epoxy Linen, Anthracite, Brique, Green Grass and Anodized Aluminium.

MODULE WITH DOORS (INDOOR)

INTERMEDIATE SHELVES

25 mm thick lacquered birch plywood.

Finish

Lacquer in Linen, Anthracite, Brique, Green Grass and Anodized Aluminium colours.

ALUMINIUM ENCLOSURE

1.5 mm thick aluminium sheet, laser-cut and folded.

Finish

Colour epoxy Linen, Anthracite, Brique, Green Grass and Anodized Aluminium.

METHACRYLATE DOORS

Sliding doors in solid methacrylate.

Finish

Translucent satin finish.



HEIGHT-ADJUSTABLE GLIDE

Plastic

Levelling glide made of injection-moulded PA6, consisting of an outer protective cap and a levelling element that allows minor floor irregularities to be compensated. Technical plastic material with good mechanical resistance, wear resistance and suitable performance for continuous use.

Finish

Linen, Anthracite, Brique and Anodized Aluminium.

ALUMINIUM FINISH

EPOXY

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven cured at 200°C (392°F).

Technical characteristics:

Thickness (ISO 2360): between 60 and 90 µm.

Adherence (ISO 2409): Grade: 0 (maximum adherence).

ANODIZED

Electrochemical process that generates a protective oxide layer, improving corrosion resistance, durability and aesthetic finish. It offers a uniform, satin, technical-looking surface while maintaining the natural texture of aluminium. Layer thickness: 25 µm. T6 temper condition. Free from volatile organic compounds (VOCs) and heavy metals.

