TECHNICAL CHARACTERISTICS

MDRYOUT

Dry out


Table

The Dry Out table captures the essence of refined design. Its structure is defined by a ribbed aluminium profile, characterised by fine lines that bring texture, rhythm and precision to the whole. Suitable for both indoor and outdoor spaces, its sober and timeless aesthetic makes it a functional and elegant solution, able to blend naturally into all kinds of environments and projects.

DESIGNED BY BLUE DESIGN & ONDARRETA TEAM



ondarreta

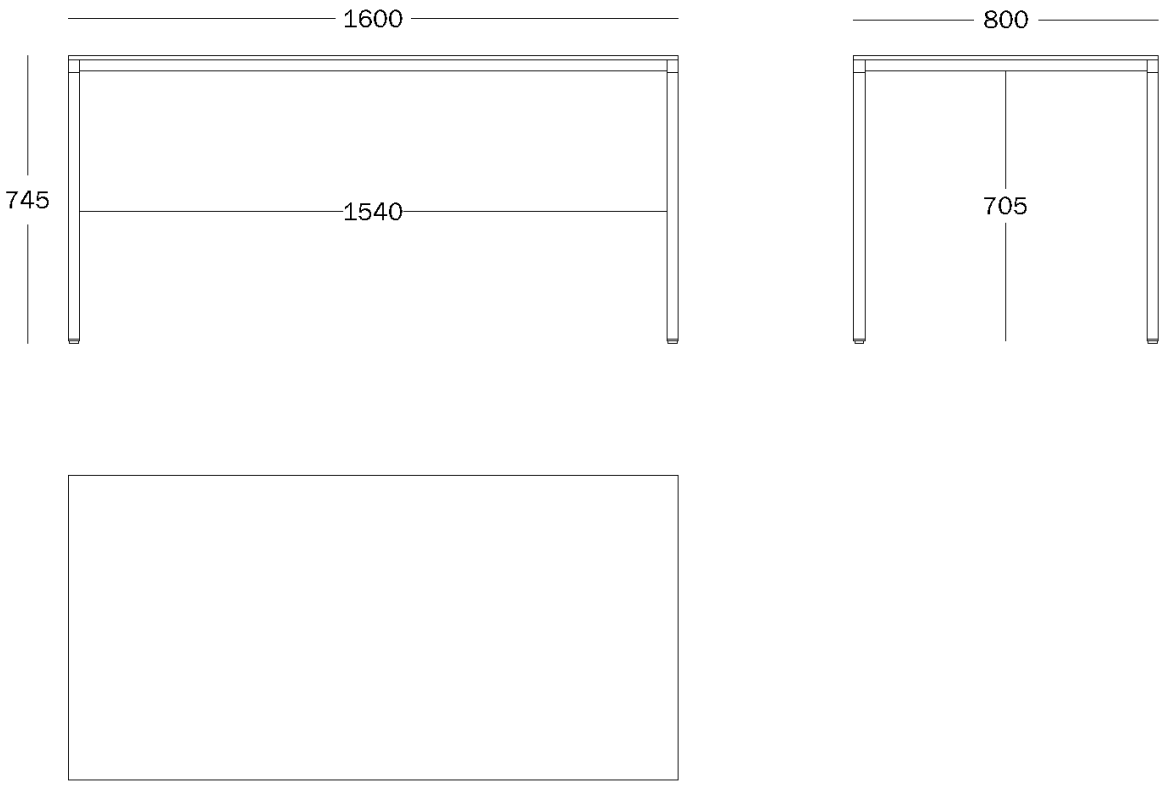

DIMENSIONS

Heights 400 / 745 mm:

800 x 800 / 1000 x 1000 / 1200 x 1200 / 1400 x 1400 / 1200 x 800 / 1600 x 800 / 1800 x 900 / 2000 x 900 mm

Heights 900 / 1000 mm:

800 x 800 / 1000 x 1000 / 1200 x 800 / 1600 x 800 / 1800 x 900 / 2000 x 900 mm

Free Height:

360 mm height 400 mm
705 mm for 745 mm height
860 mm for 900 mm height
960 mm for 1000 mm height

WEIGHT

Height 745 mm:

800 x 800 (20 kg / 44,1 lb) / 1000 x 1000 (29 kg / 63,9 lb) 1200 x 1200 (36 kg / 79,4 lb) / 1400 x 1400 (45 kg / 99,2 lb) / 1200 x 800 (28 kg / 61,7 lb) / 1600 x 800 (34 kg / 75,0 lb) / 1800 x 800 (37 kg / 81,6 lb) / 1800 x 900 (40 kg / 88,2 lb) / 2000 x 900 (44 kg / 97,0 lb)

Height 1000 mm:

800 x 800 (23 kg / 50,7 lb) / 1000 x 1000 (31 kg / 68,3 lb) / 1200 x 800 (30 kg / 66,1 lb) / 1600 x 800 (40 kg / 88,2 lb) / 1800 x 900 (46 kg / 101,4 lb) / 2000 x 900 (50 kg / 110,2 lb)

ACCESSORIES

Castors

PACKAGING

1 table per box

CERTIFICATION

Designed in accordance with the Ecodesign standard UNE-EN ISO 14006:2011.

Product tested under the European standard EN 16139:2013, category of severe use L3.

ORIGIN

100% Made in Europe


DESIGN

Blue Design & Ondarreta Team

ondarreta





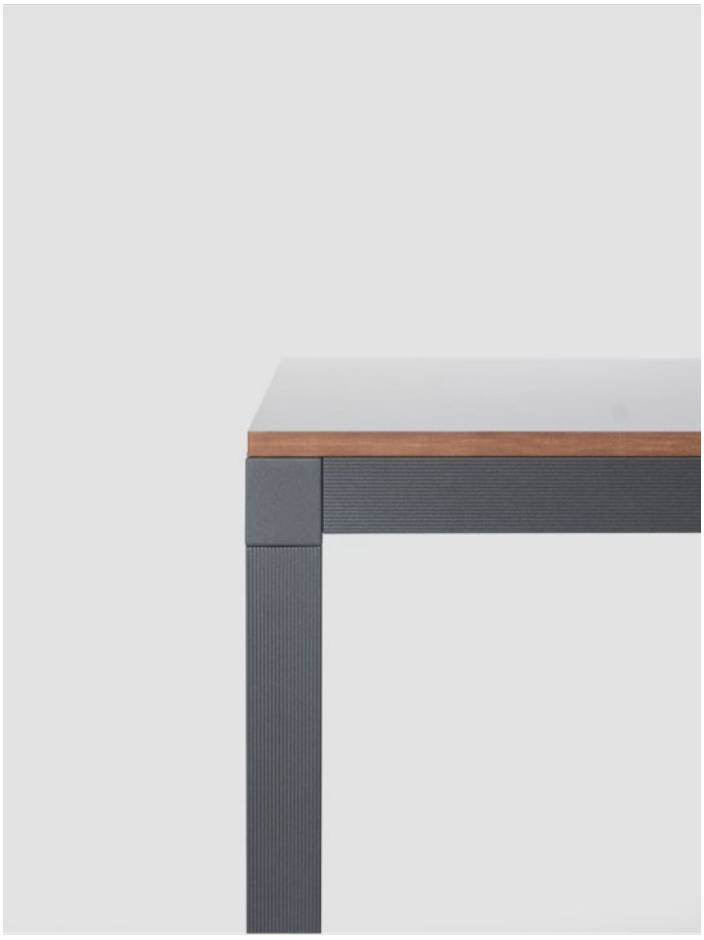

COMPONENTS

STRUCTURE

Material

Extruded aluminium profile made from 100% recycled material, with a 30 x 30 mm square section and longitudinal ribbing.
LOW CARBON material with chemical composition in accordance with EN 573-3 and mechanical properties in accordance with the values of EN 755-2, estimated from surface hardness.

UNION PIECE

Part made from die-cast aluminium, ensuring high dimensional precision and geometric consistency.
Suitable for indoor and outdoor use, with good mechanical performance, high durability and long-term stability.

Finish

Epoxy Colour Linen, Anthracite, Brique, Green Grass and Anodised aluminium.

HIGH TABLE REINFORCEMENT

Aluminium

Extruded aluminium tube made from 100% recycled aluminium, with a 30 x 30 mm square section.

Finish

Epoxy Colour Linen, Anthracite, Brique, Green Forest and Anodised Aluminium.

TABLETOP

Compact Outdoor

Compact HPL board for outdoor use, made from layers of Kraft paper impregnated with thermosetting resins and pressed under high pressure and temperature.
Highly resistant to weathering, moisture, UV rays and impact, with excellent dimensional stability and durability in outdoor environments.

Finish

Linen, Anthracite, Brique, Green Forest and Aluminium.

HEIGHT-ADJUSTABLE GLIDE

Plastic

Levelling glide made of injection-moulded PA6, consisting of an outer protective cap and a levelling element that allows minor floor irregularities to be compensated.
Technical plastic material with good mechanical resistance, wear resistance and suitable performance for continuous use.

Finish

Linen, Anthracite, Brique and Anodised Aluminium.

ondarreta





ALUMINIUM FINISH

EPOXYS

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven curated at 200ºC (392ºF).

Technical Characteristics

Thickness (ISO 2360): between 60 and 90 µm.
Adherence (ISO 2409): Grade: 0 (maximum adherence)

ANODIZED

Electrochemical process that generates a protective oxide layer, improving corrosion resistance, durability and aesthetic finish. It provides a uniform, satin surface with a technical appearance, while preserving the natural texture of aluminium. Layer thickness: 25 µm. Treatment status T6. Free of volatile organic compounds (VOC) and heavy metals.